


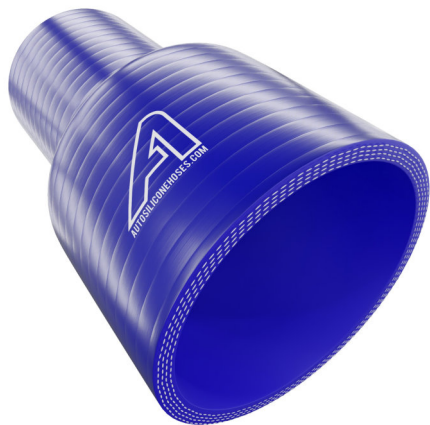

Silicone Straight Reducer

Inside Diameter	Outside Diameter	Wall Thickness	Working Pressure	Bursting Pressure	Bending Radius	Number Of Ply	Length
6.5mm	15.5mm	4.5mm	12.33 Bar	37 Bar	16mm	3	127mm
8mm	17mm	4.5mm	11.67 Bar	35 Bar	16mm	3	127mm
9.5mm	18.5mm	4.5mm	11.67 Bar	35 Bar	16mm	3	127mm
11mm	20mm	4.5mm	9 Bar	30 Bar	16mm	3	127mm
13mm	22mm	4.5mm	8.33 Bar	27 Bar	16mm	3	127mm
16mm	25mm	4.5mm	7.17 Bar	25 Bar	18mm	3	127mm
19mm	28mm	4.5mm	6.5 Bar	19.5 Bar	18mm	3	127mm
22mm	31mm	4.5mm	5.8 Bar	17.4 Bar	20mm	3	127mm
25mm	34mm	4.5mm	5.5 Bar	16 Bar	30mm	3	127mm
28mm	37mm	4.5mm	5.33 Bar	16 Bar	30mm	3	127mm
30mm	39mm	4.5mm	5.33 Bar	16 Bar	30mm	3	127mm
32mm	41mm	4.5mm	5.17 Bar	15.5 Bar	32mm	3	127mm
35mm	44mm	4.5mm	5 Bar	15 Bar	35mm	3	127mm
38mm	47mm	4.5mm	5 Bar	15 Bar	35mm	3	127mm
40mm	49mm	4.5mm	4.83 Bar	14.5 Bar	35mm	3	127mm
45mm	54mm	4.5mm	4.67 Bar	14 Bar	40mm	3	127mm
48mm	57mm	4.5mm	4.5 Bar	13.5 Bar	45mm	3	127mm
51mm	62mm	5.5mm	4.5 Bar	13.5 Bar	51mm	4	127mm
54mm	65mm	5.5mm	4.33 Bar	13 Bar	60mm	4	127mm
57mm	68mm	5.5mm	4.33 Bar	13 Bar	60mm	4	127mm
60mm	68mm	5.5mm	4.17 Bar	12.5 Bar	60mm	4	127mm
63mm	71mm	5.5mm	4 Bar	12 Bar	63mm	4	127mm
65mm	74mm	5.5mm	3.85 Bar	11.5 Bar	65mm	4	127mm
68mm	79mm	5.5mm	3.6 Bar	11 Bar	65mm	4	127mm

SKU - SSR

Operating Temperature
-50°C to +250°C

Peak Temperature
+250°C

Inner Layer Material
Smooth Extruded Silicone Compound

Reinforcement
Polyester Braids

Outer Layer Material
Silicone

Standard
SAEJ20R3

Colour



View Product Online

Hoses UK

Unit 5 Holme Bank Mills
Station Road
Mirfield
West Yorkshire
WF14 8NA

Contact:

01924 496111
web@hosesuk.co.uk
hosesuk.co.uk

Hose Distribution. Simplified.



Silicone Straight Reducer

Inside Diameter	Outside Diameter	Wall Thickness	Working Pressure	Bursting Pressure	Bending Radius	Number Of Ply	Length
70mm	81mm	5.5mm	3.5 Bar	10.5 Bar	65mm	4	127mm
76mm	77mm	5.5mm	3.5 Bar	10.5 Bar	65mm	4	127mm
80mm	91mm	5.5mm	3.33 Bar	10 Bar	70mm	4	127mm
83mm	94mm	5.5mm	3.17 Bar	9.5 Bar	70mm	4	127mm
90mm	101mm	5.5mm	3 Bar	9 Bar	70mm	4	127mm
102mm	113mm	5.5mm	2.8 Bar	8.5 Bar	70mm	4	127mm

SKU - SSR

Operating Temperature
-50°C to +250°C

Peak Temperature
+250°C

Inner Layer Material
Smooth Extruded Silicone Compound

Reinforcement
Polyester Braids

Outer Layer Material
Silicone

Standard
SAEJ20R3

Colour



[View Product Online](#)

Hoses UK

Unit 5 Holme Bank Mills
Station Road
Mirfield
West Yorkshire
WF14 8NA

Contact:

01924 496111
web@hosesuk.co.uk
hosesuk.co.uk

Hose Distribution. Simplified.